

## For Your Cleanliness



### AFTER SALES SERVICE


JL. Pegangsaan Dua No. 138, Kelapa Gading,  
Jakarta Utara INDONESIA 14250.

**4 IN 1 FUNCTION**

- POND
- WET
- DRY
- BLOW



**Applicable Scenarios :**

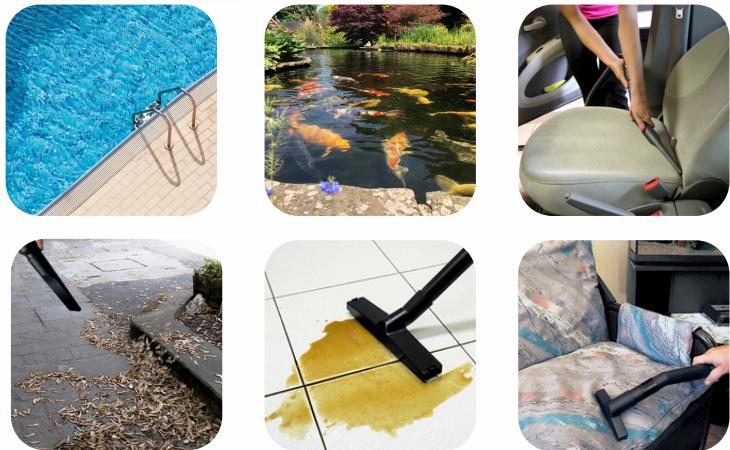

**MAIN FEATURES**

- Unique motor with high suction power (~18 kPa).
- The vacuum cleaner offers two operating models.
- The design guarantees IPX4 protection.
- Double electrical insulation.
- Impact resistant tank.
- Suction system with by-pass cooling.
- Power cable holder 4 pivoting wheels.
- Electronic card to stop/empty the tank automatically.
- 4 plastic extension pipes to reach the pool bottom.
- Power cable 5,5 m.
- Flex hoses 5 m & 2 m.

**INCLUDED ACCESSORIES**

- Extentions hose



- Flexible Vac Hose



- Drain Hose



- Crevice Nozzle



- Pond Nozzle



- Wet Brush



- Sponge filter



- Net Filter



- Drayn Fuel Cap



- Paper Bag



**Double Packaging**



**POWERFUL VACUUM MOTOR**



**MODEL**


**AQUAVAC 35 PC**

Code	9.911.0001
Power max	1400 W
Voltage	220-240V / 50-60Hz
Vacuum	180 mbar
Class	IPX 4
Suction hose length	5 M
Drain hose length	2 M
Cable length	5,5 M
Tank size	35 l
Weight	9.8 Kg
Dimension	370x370x580 mm

# AQUAJET 200



## Applicable Scenarios :

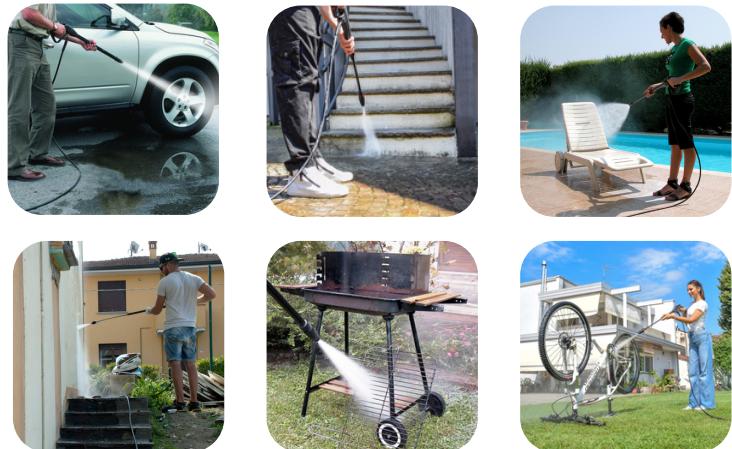

### MAIN FEATURES

- Three steel pistons, brass linear pump with high performance.
- Suction and delivery S. S. valves.
- Glycerine pressure gauge.
- Hose reel 15 M & Accessory holder.
- Ergonomic handle.
- Low noise and design modern.
- Commercial crankshaft pump with size 14 plunger + 2.4 kw induction motor high power.
- Handheld/trolley 2 in 1 and can switch freely.
- ASS : auto stop system, sprayed ceramic plunger and dual water seal structure.
- Standard long gun with 4 nozzles.



### INCLUDED ACCESSORIES

- High pressure Gun



- High pressure lance



- Hose 15 + 0.9m



- 4 Nozzles



- Inlet Hose



- Inlet Filter



### VIEWS




### MODEL

### AQUAJET 200

Code	BM24J
Power max	2.4 Kw
Voltage	220V/50Hz
Speed	2850 RPM
Opr Pressure / max	170 / 200 Bar
Working pressure / max	2465 / 2900 Psi
Flow rate	12 lpm
Type pump	HMK14085
Weight	31 kg
Dimension	670 x 460 x 440 mm

**Applicable Scenarios :**

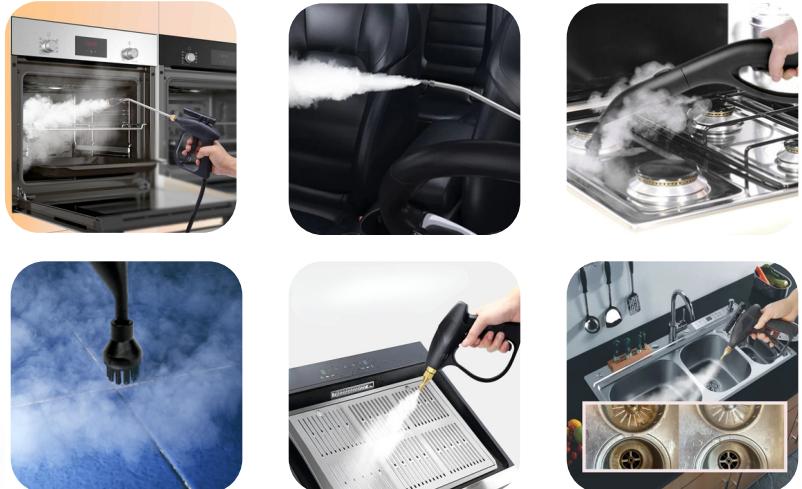

**MAIN FEATURES**

- Simple design in 1 box compartment.
- Saturated steam at 3,5 bar at a temperature of <120°C.
- Boiler 3,0 kW max.
- Heating and activation time required 30 second.
- Pressure switch.
- 3 gears adjustable wet and dry steam (Just spraying steam).
- 3 gears adjustable hot water (Just spray steam/cold water/hot water).
- 3 gears adjustable cold water (Just cold water spray).
- Continuous water filling system.
- Control panel with lamps.
- Impact resistant covers.
- Steam regulation.
- Power cable 1,4 M.

**INCLUDED ACCESSORIES**



**High temperature steam cleaning machine**

Whole house clean. One machine  
Sterilization and mite removal rate of up to 99.99%, pure physical steam cleaning, enjoy a healthy life



MODEL	STEAMJET 3000
Code	CNTQXG
Power max	3000 W
Voltage	220-240V
Frequency	50Hz/60Hz
Steam pressure max	3.5 Bar
Water consumption	2.8L/Min
Working temperature	<120 C
Power cord length	1.4 M
Steam pipe length	3 M
Weight	4.8 Kg
Dimension	430x240x185 mm